



**Cordless Impact Driver
DTD155**



3-mode operations

A-mode + 2 impact power selections

(Assist mode)

(Soft/ Hard)

for multiple applications




Max Fastening Torque

140 N·m



Slim motor housing thanks to compact BL motor

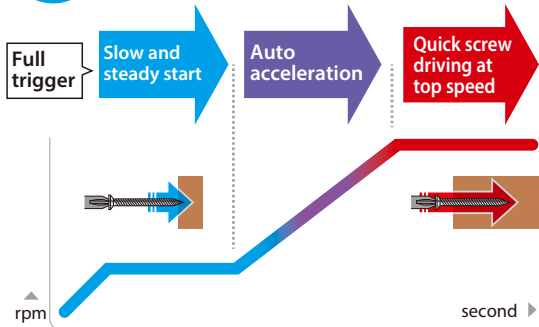

Powered by 18V Li-ion battery

with Battery fuel gauge

- BL1860B: 6.0Ah
- BL1850B: 5.0Ah
- BL1840B: 4.0Ah
- BL1830B: 3.0Ah
- BL1820B: 2.0Ah
- *BL1815N: 1.5Ah

*(without Battery fuel gauge)



BL1850B

Fast Charger

DC18RC



Charger

DC18SD



Cordless Impact Driver

- Variable Speed
- Brake
- Reversing
- Electronic 2-Speed
- Built-in Job Light
- Carrying Case

DTD155

Capacity	Machine screw : M4 - M8mm (5/32" - 5/16") Standard bolt : M5 - M14 (3/16" - 9/16") High strength bolt : M5 - M12 (3/16" - 1/2") Coarse thread (in length): 22-90mm (7/8" - 3-1/2")
Hex Shank	6.35 mm (1/4")
No Load Speed (RPM)	Hard/soft: 0 - 3,000 / 0 - 1,300
Impacts Per Minute (IPM)	Hard/soft: 0 - 3,900 / 0 - 1,600
Max Fastening Torque	140 N·m (1,240 in.lbs.)
Vibration Level	14.0 m/s ²
Sound Pressure Level	94dB(A)
Sound Power Level	105dB(A)
Dimensions (L x W x H)	135x79x232mm (5-5/16"x3-1/8"x9-1/8")
Net weight	1.2 kg (2.6 lbs)

Standard Equipment : Battery, Charger, Belt Clip

weight according to EPTA-Procedure 01/ver.2.1

Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 201701