

# Wide range of accessories available for various applications

Please see "Accessories for Multi Tool" for detailed information on the shape, size, recommended use and material of each blade.

## Cutting (plunge cutting)



**Applications:**  
Cutting of various materials such as oak wood, drywalls, plastics, copper pipes, non-hardened nails, etc.

**Benefits:**

- Different from jig saws, etc, able to make a plunge cut in the wall for electrical connection box, lighting, exhaust fan, etc.
- The blade can be positioned in twelve different angles to allow easy operation in tight spaces.

## Cutting



**Applications:**  
Cutting of various materials such as oak wood, drywalls, plastics, copper pipes, non-hardened nails, etc.

**Benefits:**

- Able to perform long distance push cut.
- The segment shape allows flush cutting.

## Sanding



**Applications:**  
Wood sanding, concrete sanding, or paint removal, etc. with a variety range of abrasive papers.

**Benefits:**

- Able to sand in corners.
- Connectable to vacuum cleaner with optional dust extraction system.

## Removing grout/ Cutting tiles



**Applications:**  
Replacing broken wall or floor tile.

**Benefits:**

- Less amount of dust scattering thanks to oscillating action.
- The segment shape allows flush cutting.

## Scraping



**Applications:**  
Removing mortar, tile adhesive, hardened glue, window putty, caulking, paint, etc.

**Benefits:**  
Low-profile blade with a narrow tip allows easy removal of caulking, window putty, etc.

## Dust extraction system (Option)

Part No. 196765-1



Dust extraction system is available as an option for aggressive dust removal in applications with sanding pad.

Cordless Multi Tool	DTM51 / DTM41	
	DTM51	DTM41
Oscillations per minute (opm)	6,000-20,000	6,000-20,000
Dimensions (L x W x H)	326x80x122mm (12-7/8"x3-1/8"x4-13/16") with BL1815	326x80x104mm (12-7/8"x3-1/8"x4-1/8") with BL1415
	340x80x122mm (13-3/8"x3-1/8"x4-13/16") with BL1830	340x80x104mm (13-3/8"x3-1/8"x4-1/8") with BL1430
Net weight*	2.0kg (4.4lbs) with BL1815 or BL1815N 2.2kg (4.9lbs) with BL1830 or BL1840	2.0kg (4.3lbs) with BL1415 2.1kg (4.7lbs) with BL1430 or BL1440
	Variable Speed	Soft Start
	Dust Collecting	Carrying Case
<b>Standard Equipment:</b> Fast Charger, Battery Cartridge, Oscillating Multi Tool Accessories		

\*weight according to EPTA-Procedure 01/2003

Items of standard equipment and specifications may vary by country or area.

## Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN BE-AD



Cordless Multi tool  
DTM51 DTM41

Satisfy Professional's Needs



# Tool-less Accessory Change

Lever style lock system allows for quick installation and replacement of the accessories.



Compatible with all OIS accessories  
(Oscillating Interface System)



Photo : DTM51

## Extra Versatility

Wide selection of accessories available for various applications



The standard equipment may vary by country.



Cutting PVC, FRP pipes



Cutting metals



Wood flush cutting



Wood plunge cutting



Deep plunge cutting



Sanding and polishing various materials



Cutting tiles



Removing mortar, tile adhesive



Routing joints on wall tiles




Corner cutting



Cutting window putty, silicone



Cutting polystyrene, rubber

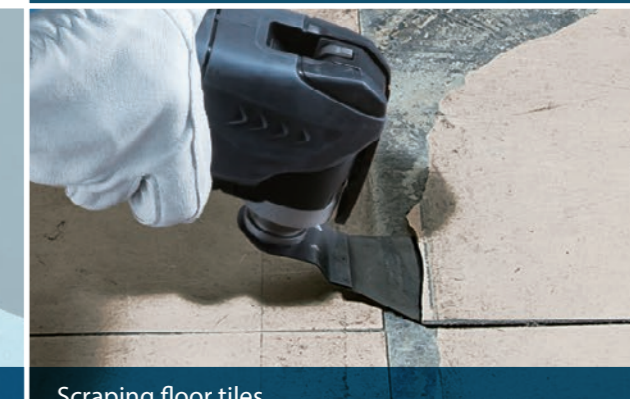

Scraping floor tiles

# High operation efficiency

- Up to 20,000 oscillations per minute
- 3.2° oscillation angle



Photo: DTM51

Variable speed control by dial

Anti-restart function

Battery capacity warning lamp

Soft start

allows accurate landing of the blade on the surface of workpiece in various applications.

## Multi angle setting



Fully 360° multi angle setting enables users to position accessories in 12 different angles (each 30°) to allow access to tight spaces for optimum maneuverability.

Items of standard equipment may vary by country or area.

## Ergonomically best possible barrel grip



- ergonomically designed to suit many different ways to grip required in many different applications with a wide range of accessories.
- with the on-off slide switch so ergonomically positioned that you can turn it on/off with the finger of your hand holding the grip.

## Powered by Li-ion Battery

DTM51	18V LITHIUM-ION	DTM41	14.4V LITHIUM-ION
BL1850	5.0 Ah	BL1440	4.0 Ah
BL1840	4.0 Ah	BL1430	3.0Ah
BL1830	3.0Ah	BL1415	1.3Ah
BL1815/N	1.3/1.5Ah		