




Type	Width [mm]	Height [mm]	Depth [mm]	Connections spacing [mm]	Connections distance from the wall [mm]	Brackets spacing [mm]	Heating surface [m ²]	Weight [kg]	Capacity [dm ³]	Power (75/65/20 °C) [W]	Power (75/65/24 °C) [W]	Power (55/45/24 °C) [W]	Electric heater maximal power [W]
	W	H	D	C	B	A							
E-611P	575	1070	92-97	50	72-77	100	0,88	14,1	4,9	530	476	228	300
E-611L	575	1070	92-97	50	72-77	100	0,88	14,1	4,9	530	476	228	300
E-614P	575	1364	92-97	50	72-77	100	1,11	17,6	6,2	662	595	286	600
E-614L	575	1364	92-97	50	72-77	100	1,11	17,6	6,2	662	595	286	600
E-617P	575	1658	92-97	50	72-77	100	1,34	21,2	7,5	791	711	343	600
E-617L	575	1658	92-97	50	72-77	100	1,34	21,2	7,5	791	711	343	600




Right version
Fitting of a heater or
a VHX-M valve only in
the indicated hole!



Left version
Fitting of a heater or
a VHX-M valve only in
the indicated hole!

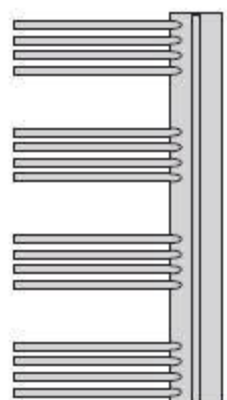


Sizes as below



Horizontal tubes:

Vertical manifolds:



Finish and guarantee:

- standard: phosphatizing + polyester-epoxy lacquer;
5 year guarantee;
- on request: electrophoresis + polyester-epoxy lacquer;
10 year guarantee;
- polished and coated with galvanic chrome decorative trim

Mounting brackets:

- set for assembly on the wall
- brackets in the colour of a towel rail

Valve:

for a separate order – page 25

Heater :

for a separate order – page 24

Working pressure:

4 bars

Maximal temperature:

95 °C

Connections:



- bottom connection with 50mm spacing,
placed as on the drawings
- inner threads G 1/2
- air-vent plug G1/8 hidden behind

Left version E-...L

Right version E-...P

