

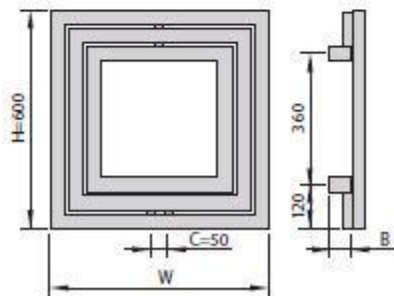


Type	Width [mm]	Height [mm]	Depth [mm]	Connections spacing [mm]	Connections distance from the wall [mm]	Brackets spacing [mm]	Heating surface [m ²]	Weight [kg]	Capacity [dm ³]	Power (7.5/6.5/20 °C) [W]	Power (7.5/6.5/24 °C) [W]	Power (5.5/4.5/24 °C) [W]	Electric heater maximal power [W]
	W	H	D	C	B	A							
L-606	600	600	90-95	50	45-50	560	0,75	9,2	5,5	428	386	189	-



Circuital profile:



Finish and guarantee:

- standard: phosphatizing + polyester-epoxy lacquer; 5 year guarantee;
- on request: electrophoresis + polyester-epoxy lacquer; 10 year guarantee;

Mounting brackets:

- set for assembly on the wall
- brackets in the colour of a towel rail

Valve:

for a separate order – page 25

Heater :

for a separate order – page 24

Working pressure:

4 bars

Maximal temperature:

95 °C

Connections:



- inner threads G 1/2
- air-vent plug G1/2 hidden behind